


# PARX

PARX150W-ASYM

SAP CODE: 2000886

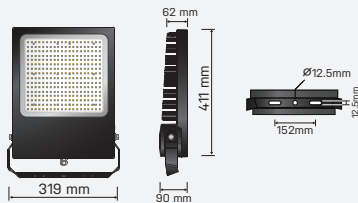

## 150W, high powered LED floodlight


Powerful LED floodlight with asymmetric lens to minimise light spillage.

### Accessories

GLARE SHIELD; POLE MOUNT; TENON MOUNT; WIREGUARD



### Photometric Diagram



Unit: cd

- C0/180 105.0deg  
- C90/270 70.0deg

## KEY INFORMATION

Lumen Output	20090lm
Input Power	150W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	BLACK
Warranty	3yr
IP Rating	IP65
IK Rating	IK09
IC Rating	N/A
Rebate Scheme Approvals	IPART; REES LCP 154.11

## PHOTOMETRIC

Efficacy	134lm/W
LED	SMD
CCT	5000K
CRI	>80
Beam Angle	100°x66°

## ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	65VDC
Power Factor	>0.9
LED Input Current (nominal)	2400mA
Useful life @Ta25° (L70)	50,000hr

## CONSTRUCTION

Housing	Aluminium 1070
Optics	Polycarbonate Diffuser
Adjustable Angle	0-180°
Fixings/Hardware	Mounting Bracket
Connection Type	1.2m Flex
Total Weight	7.8kg
Dimensions	411x319x90mm
Operating Ambient Temp.	-30 to 50°C
Electrical Classification	Class 1