


VANGUARD SERIES

Using slimline back-lit technology, the Vanguard Panel provides the most efficient, reliable and affordable LED panel solution for commercial and office space applications. The Vanguard's technology allows light to naturally project through less material, ensuring the panel will not age or discolour over time.

Available in 4000K, 5000K, tri-colour and remote controlled dual motion & lux sensor options.

FEATURES

- Affordable high-efficacy LED panel
- No shadowing or aging
- Flex and plug included
- Tri-colour options (4000K, 5000K and 6000K)

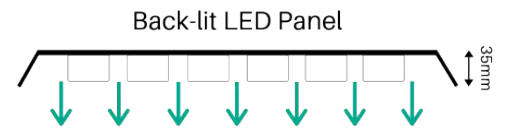

SPECIFICATIONS

| | |
|-----------------------------|------------|
| POWER FACTOR | >0.9 |
| CRI | >80 |
| BEAM ANGLE | 120° |
| IP RATING | 20 |
| LIFETIME (L ₇₀) | >60,000hrs |
| WARRANTY | 5 Years |

*model available in 4000K & 6000K

| MODEL NUMBER | CCT | DIMENSIONS | UGR | SENSOR | WATT | LCP | LUMENS | EFFICACY |
|--------------------|-----------|------------|-----|--------|------|-------|--------|----------|
| EP-VG-4K19-123-25 | 4000K | 1200x300mm | <19 | No | 25 | 24.87 | 3052 | 123lm/W |
| EP-VG-66-17 | 5000K | 600x600mm | <22 | No | 17 | 16.93 | 2141 | 126lm/W |
| EP-VG-123-17 | 5000K | 1200x300mm | <22 | No | 17 | 17 | 2400 | 120lm/W |
| EP-VG-123-25 | 5000K* | 1200x300mm | <22 | No | 25 | 25 | 3000 | 120lm/W |
| DUAL SENSOR | | | | | | | | |
| EP-VG-S66-17 | 5000K | 600x600mm | <22 | Yes | 17 | 16.94 | 2150 | 127lm/W |
| EP-VG-S123-15 | 5000K | 1200x300mm | <22 | Yes | 15 | 14.98 | 2208 | 147lm/W |
| EP-VG-S123-17 | 5000K | 1200x300mm | <22 | Yes | 17 | 16.96 | 2165 | 128lm/W |
| EP-VG-S123-25 | 5000K | 1200x300mm | <22 | Yes | 25 | 24.81 | 3132 | 126lm/W |
| TRI-COLOUR | | | | | | | | |
| EP-VG-T63-10 | 4/5/6000K | 600x300mm | <22 | No | 10 | 9.89 | 1247 | 126lm/W |
| EP-VG-T66-25 | 4/5/6000K | 600x600mm | <22 | No | 25 | 23.92 | 3361 | 141lm/W |
| EP-VG-T123-25 | 4/5/6000K | 1200x300mm | <22 | No | 25 | 24.92 | 3510 | 141lm/W |
| EP-VG-T123-35 | 4/5/6000K | 1200x300mm | <22 | No | 35 | 34.92 | 4812 | 138lm/W |
| EP-VG-T126-35 | 4/5/6000K | 1200x600mm | <22 | No | 35 | 35.55 | 4890 | 146lm/W |

