LIGHTING LED FLOODLIGHTS






SLIMLINE FLOODLIGHT SERIES

The Slimline Floodlight range is lightweight and easy to install. Using Phillips LED chips and delivering over 120 lumens per watt, this highly efficient floodlight combines high energy savings and crisp even light distribution across its broad beam angle.

With an IP65 rating and suitability across a wide temperature range, the Slimline Floodlight is built to withstand the elements. The 70W model also includes a dual motion & lux sensor.

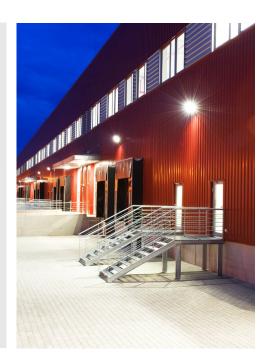

FEATURES

- High efficacy
- Lightweight and slimline
- Flex and plug included
- IP65 rating
- Dual motion & lux sensor (70W model)

SPECIFICATIONS

POWER FACTOR	>0.9
CRI	>80
BEAM ANGLE	110°
IP RATING	65
LIFETIME (L70)	>70,000h
WARRANTY	5 Years

MODEL NUMBER	ССТ	DIMENSIONS	WATT	LCP	LUMENS	EFFICACY
EP-FLG2-15	5000K	148x38x117mm	15	14.80	1800	122lm/W
EP-FLG2-30	5000K	200x43x149mm	30	28.44	3401	120lm/W
EP-FLG2-50	5000K	250x51x188mm	50	49.61	6302	128lm/W
°' と%″Ž%ž\$						
EP-FL-70S	5000K	ТВА	70	66.73	9073	136lm/W

