





VISTA

VISTA20/40W12-TRI

SAP CODE: 2001161

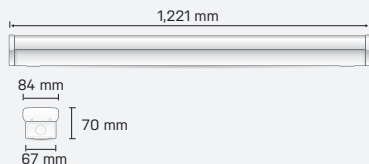

Photometric Diagram



Unit: cd
 - C0/180 110.0deg
 - C90/270 110.0deg

1200mm, 20/40W
Ecoswitch, Tritone,
conventional
appearance LED batten

An LED replacement for conventional battens with Tritone switchable colour temperature.

Accessories

SUSPENSION KIT; WIREGUARD

KEY INFORMATION

Lumen Output ^{40W}	4540 / 4880 / 4470lm
- Low Power Mode ^{20W}	2400 / 2510 / 2430lm
Input Power	20 / 40W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP20
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	VEET; REES; IPART LCP 43.67

PHOTOMETRIC

Efficacy ^{40W}	114 / 122 / 112lm/W
- Low Power Mode ^{20W}	120 / 125 / 121lm/W
LED	SMD
CCT	4000 / 4700 / 5700K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	20-57VDC
Power Factor	>0.9
LED Input Current (nominal)	350-700mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA14
Total Weight	2kg
Dimensions	1221x84x70mm
Operating Ambient Temp.	-30 to 50°C
Electrical Classification	Class 1
Food Grade Approval	HACCP

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.