


- Selectable colour temperature, weather proof downlight.

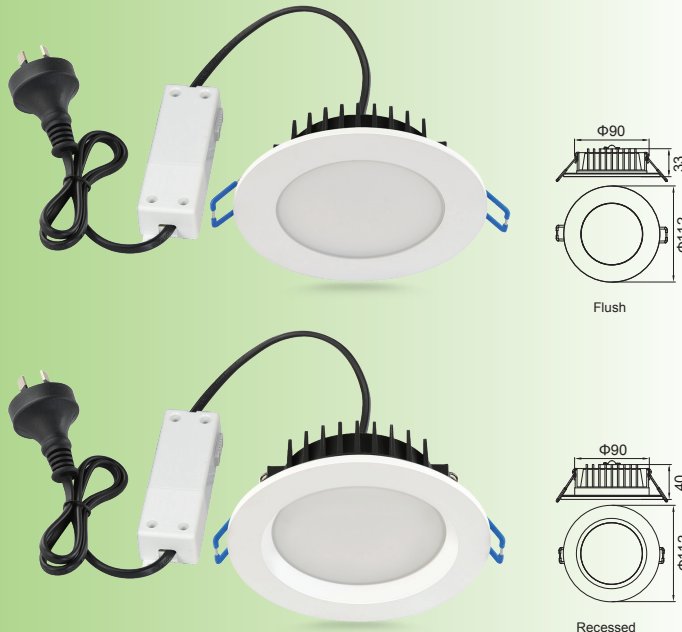

Features

- Plastic downlight with internal aluminium heat sink
- High efficiency SMD LED chips
- Easy installation
- IP54 weatherproof after installation
- Three selectable colour temperatures
- IC-4 rating. Can be installed under ceiling insulation
- Opal polycarbonate diffuser

Dimming Options

- Trailing and Leading Edge
- Universal

Includes

- Dimmable LED driver
- 1.2 m flex and plug

Applications

- Residential
- Hotels and shops
- Conference rooms
- Reception areas
- Bathrooms and wet areas

Warranty

- Five years for fitting

CERTIFICATION			IP RATING	DIMMABLE	TRI-COLOUR	Ra	DISTRIBUTION
				 leading and trailing edge		 Ra≥80	

Order Code	Part No.	Model No.	Voltage	Watt.	PF	Color Temp.	Lumens	Beam Angle	Lifetime L70B50	Diffuser	Net Weight (kg)
172083	172083A	RS3A3-WDC 8W	220-240V	8W	0.9	3000K/4000K/5700K	750/800/800lm	100°	35000h	Flush	0.24
172084	172084A	RS3B3-WDC 8W	220-240V	8W	0.9	3000K/4000K/5700K	750/800/800lm	100°	35000h	Recessed	0.24

[1] Operating Frequency=50/60Hz;

[2] Operating Temperature:-20 °C ~ +40 °C

