



FOCUS

W20W350R4K120DF

SAP CODE: 2000512

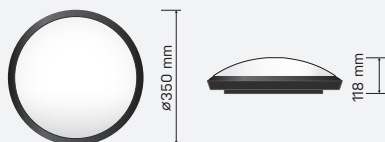

Photometric Diagram

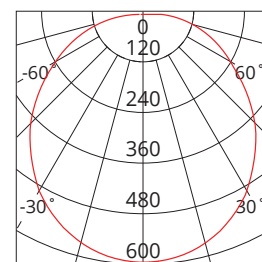

Unit: cd
 - C0/180 110.0deg
 - C90/270 110.0deg

20W, outdoor, LED bunker

A powerful and robust circular bunker light made to withstand the elements.

KEY INFORMATION

Lumen Output	1410lm
Input Power	20W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	BLACK
Warranty	5yr
IP Rating	IP66
IK Rating	IK08
IC Rating	N/A
Rebate Scheme Approvals	REES; IPART LCP 19.32

PHOTOMETRIC

Efficacy	71lm/W
LED	SMD
CCT	4000K
CRI	>80
Beam Angle	110°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	36VDC
Power Factor	>0.9
LED Input Current (nominal)	350mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA14
Total Weight	1kg
Dimensions	Ø350x118mm
Operating Ambient Temp.	-25 to 50°C
Electrical Classification	Class 2